

# Current Sense Amplifiers



Monitoring

Efficiency



Feedback Protection Data Logging



Data Logging



Monitoring Efficiency Protection



Data Logging Feedback Efficiency

Feedback



Monitoring



[www.ti.com/currentsense](http://www.ti.com/currentsense)

2017



Efficiency



Protection

# Current Sense Amplifiers

## Introduction

### What are Current Sense Amplifiers?

Current sense amplifiers, also called current shunt monitors, are specialized differential amplifiers with a precisely matched resistive gain network with the following characteristics:

- Designed to monitor the current flow by measuring the voltage drop across a sense element, typically a shunt resistor
- Tend to be easier to use, more precise and less prone to noise
- Support currents from mA to 100s of A
- Natively support common-mode voltages from -16 to +80V and with additional circuitry up to 100s of volts

### System benefits addressed by using current sense amplifiers:

- Real-time overcurrent protection
- Current and power monitoring for system optimization
- Current measurement for closed-loop feedback

### Key Parameters

#### Common Mode Range:

This specification defines the DC voltage range at the input of an amplifier with respect to ground. Current sense amplifiers are typically designed to support common-mode voltages well beyond the chip supply voltage. For example, the INA282 is capable of supporting a common-mode voltages between -14V to +80V while running on a supply as low as 2.7V.

#### Offset Voltage:

This is a differential DC error at the input of the amplifier. Historically, to reduce the impact of amplifiers with high offsets, larger value shunt resistors were used to increase the measured voltage drop. Today, TI is able to offer current sense amplifiers with offsets as low as 10 $\mu$ V, enabling higher precision measurements at low currents and allowing the use of smaller value shunt resistors for improved system efficiency.


#### Gain:

Current sense amplifiers come with various gain options that have robust performance over temperature and process variations by integrating a precisely matched resistive gain network. The gain options for fixed gain amplifiers vary from 0.125V/V to 1000V/V with gain errors as low as 0.01%.

#### Temperature Stability:

Current sense amplifiers integrate the amplifier along with all the gain-setting resistors which enables small and unified temperature drift. This allows for robust current measurements across the whole specified temperature range. The achieved temperature stability is one of the key features current sense amplifiers have over discrete implementations.

### Analog Output




Integrates the full analog signal processing and provides a voltage or current output.

### Digital Output




Integrates the full signal conditioning path and utilizes a standard 2-wire digital interface.

### Comparator Output



Provides a simple ALERT signal when the load current exceeds a threshold.

### Integrated Shunt



Offers a low-drift, precision integrated sense element.

# Current Sense Amplifiers

## Key Design Considerations

### High-Side Measurements

Current sensing techniques connect the current sense element between the supply bus and the load.

#### System Advantages:


- Difficult to detect load short to ground
- Current is monitored directly from the source
- High immunity to ground disturbance

#### System Challenges:

- High bus voltage limits the availability of high input common-mode voltage devices

#### Advantages Over Discrete Current Sense Circuit:

- Integrated gain resistors provide excellent matching to enable a higher performing and more stable platform
- Reduction in board space requirements
- High dynamic changes in the common-mode voltage are difficult to achieve with standard op amps
- Unique input architecture allows for the common-mode voltage to greatly exceed the device supply voltage

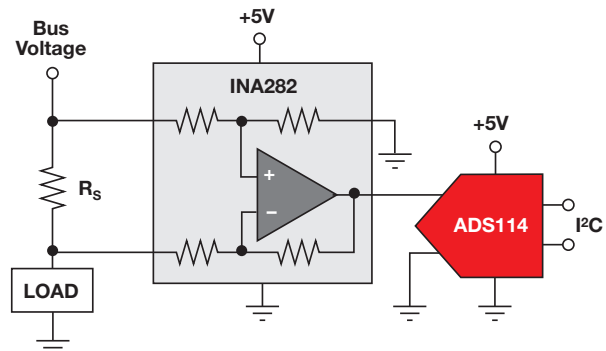

### Low-Side Measurements

Current sensing techniques connect the current sense element between the load and ground.

#### System Advantages:


- Simple to implement and low-cost solution
- Wide range of available options

#### System Challenges:

- Difficult to detect load short to ground
- System ground disturbance by the shunt resistor


#### Advantages Over Discrete Current Sense Circuit:

- Integrated gain resistors provide excellent matching to enable a higher performing and more stable platform
- Reduction in board space requirements
- True differential measurement across the shunt resistor
- Lower  $V_{\text{OFFSET}}$  saves system power by enabling the use of smaller value shunt resistors to achieve the same error level

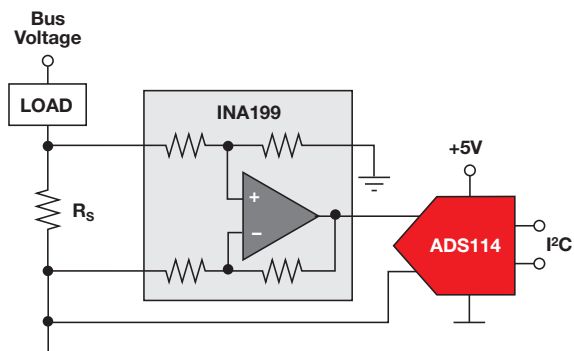

### Total Error



- For light loads with small current values that result in small differential voltage signals at the input, the total error will be dominated by the amplifier's offset voltage. Low input offsets are critical to achieving accurate measurements at the low end of the dynamic range.
- For heavy loads with large current values that result in large differential voltage signals at the input, the total error will be dominated by the amplifier's gain error.

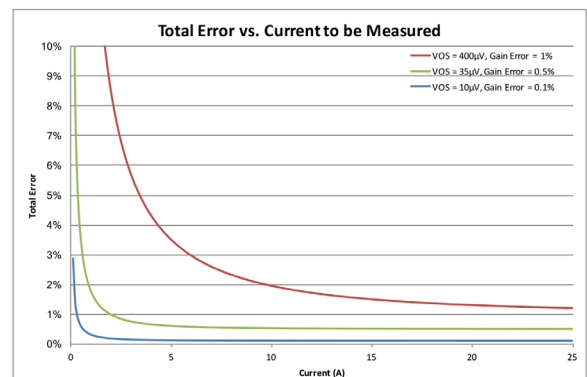

Current sensing reference designs from the TI Designs library. See more designs online at [ti.com/tidesigns](https://ti.com/tidesigns).

Design Number	Description	
TIDA-00795	<p><b>Automotive Precision eFuse</b></p> <p>One of the keys to preventing damage in automotive electronic systems is the ability to detect and react to potentially damaging conditions as rapidly as possible. This INA300-Q1 eFuse reference design is focused on providing high accuracy and fast response over-current protection at current levels as high as 30 A and scalable to &gt; 100 A.</p>	
TIDA-00528	<p><b>40V to 400V Unidirectional Current/Voltage/Power Monitoring</b></p> <p>This TI Design demonstrates a simple, non-isolated technique using a precision op amp and a high voltage P-FET to extend the common-mode voltage of a current sense amplifier up to 400 V. With minor component changes, this design can be optimized for any voltage ranging from 40 to 400 V.</p>	
TIDA-00753	<p><b>Three-phase Current Measurements for Motor</b></p> <p>Maximizing motor control requires accurate current measurement. This reference design featuring the INA199 demonstrates a method for enhancing the signal chain on the output of a current transformer. In addition, this circuit offers significant power savings by lowering the burden resistor value.</p>	

Current sensing reference designs from the TI Designs library. See more designs online at [ti.com/tidesigns](http://ti.com/tidesigns).

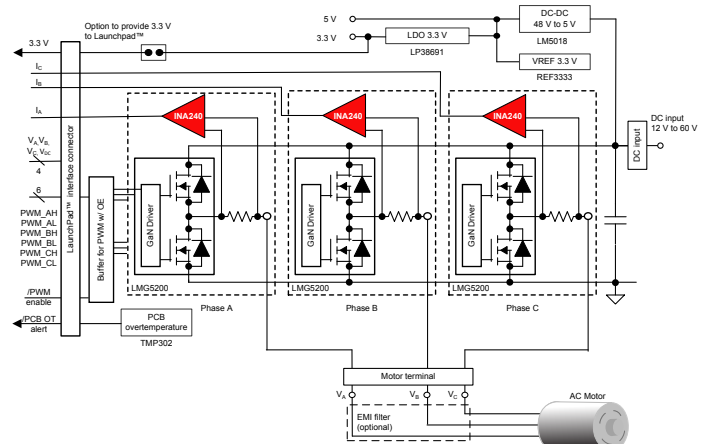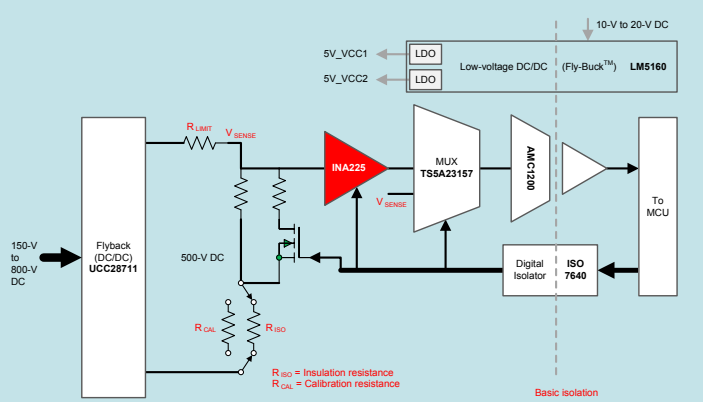Design Number	Description
<b>TIDA-00913</b>	<p><b>48V 3-Phase Inverter with Shunt-based In-line Motor Phase Current Sensing</b></p> <p>This design realizes a 48V/10A 3-phase GaN inverter with precision in-line shunt-based phase current sensing for accurate control of precision drives such as servo drives. One of the largest challenges with in-line shunt-based phase current sensing is the high common-mode voltage transients during PWM switching. The INA240 current sense amplifier overcomes this problem using enhanced PWM rejection.</p> 
<b>TIDA-00440</b>	<p><b>Leakage Current Measurement Reference Design for Determining Insulation Resistance</b></p> <p>This design provides a reference solution to measure insulation resistance up to 100MΩ. It has an on-board isolated 500V DC power supply and an isolated signal conditioning circuit to measure the leakage current. This design is useful to find leakage due to insulation breakdown in transformer and motor windings.</p> 

## TI TechNotes

Current and power measurement use cases in a short, easy-to-read format

[Browse now](#)



# Current Sense Amplifiers

## Featured Products

Part Number	AEC-Q100 Available	Bi-Directional	Low-Side	Description	Common Mode Voltage Range	Input Offset $\pm\mu\text{V}$ Max	Input Offset Drift $\pm\mu\text{V}/^\circ\text{C}$ Typ	Gain Error % Typ	Package(s)
<a href="#">INA210 Family</a>	✓	✓	✓	High performance, Zero-Drift Current Sense Amplifier	-0.3 to 26	35	0.1	0.02	10 UQFN, 6 SC70
<a href="#">INA282 Family</a>	✓	✓	✓	High Performance, High Common Mode Current Sense Amplifier	-14 to 80	70	0.3	0.4	8 VSSOP, 8 SOIC
<a href="#">INA240 Family</a>	✓	✓	✓	High AC CMRR High Common Mode Current Sense Amplifier for Motor & Solenoid Control	-4 to 80	25	0.05	0.05	8 TSSOP, 8 SOIC
<a href="#">INA216 Family</a>				Ultra-small, 5V Current Sense Amplifier	1.8 to 5.5	100	0.06	0.01	10 UQFN, 4 WSCP
<a href="#">INA199 Family</a>	✓	✓	✓	Value line, Zero-Drift Current Sense Amplifier	-0.3 to 26	150	0.1	0.03	10 UQFN, 6 SC70
<a href="#">INA180 Family</a>	✓		✓	350kHz Bandwidth, Unidirectional Current Sense Amplifier for Cost-sensitive Applications	-0.2 to 26	150	0.2	0.1	5 SOT-23, 5 SC70
<a href="#">INA181 Family</a>	✓	✓	✓	350kHz Bandwidth, Bidirectional Current Sense Amplifier for Cost-sensitive Applications	-0.2 to 26	150	0.2	0.1	6 SOT-23, 6 SC70
<a href="#">INA2180 Family</a>	✓		✓	Dual 350kHz Bandwidth, Unidirectional Current Sense Amplifier for Cost-sensitive Applications	-0.2 to 26	150	0.2	0.1	8 VSSOP
<a href="#">INA2181 Family</a>	✓	✓	✓	Dual 350kHz Bandwidth, Bidirectional Current Sense Amplifier for Cost-sensitive Applications	-0.2 to 26	150	0.2	0.1	10 VSSOP
<a href="#">INA4180 Family</a>	✓		✓	Quad 350kHz Bandwidth, Unidirectional Current Sense Amplifier for Cost-sensitive Applications	-0.2 to 26	150	0.2	0.1	14 TSSOP
<a href="#">INA4181 Family</a>	✓	✓	✓	Quad 350kHz Bandwidth, Bidirectional Current Sense Amplifier for Cost-sensitive Applications	-0.2 to 26	150	0.2	0.1	20 TSSOP
<a href="#">INA225</a>	✓	✓	✓	Programmable-Gain, Zero-Drift, High Accuracy	0 to 36	150	0.2	0.05	8 MSOP
<a href="#">LMP8481 Family</a>	✓	✓		High Common Mode, High-Speed Current Sense Amplifier	4.5 to 76	265	6	0.6	8 VSSOP
<a href="#">LMP8640 Family</a>	✓		✓	High-Speed Current Sense Amplifier	-2 to 42	900	2.6	0.25	6 SOT
<a href="#">INA193 Family</a>	✓		✓	High Common Mode, High-Speed Current Sense Amplifier	-16 to 80	2000	2.5	0.2	5 SOT-23
<a href="#">INA250 Family</a>	✓	✓	✓	High Accuracy, Zero-Drift Current Sense Amplifier with 0.1%, 15 PPM/ $^\circ\text{C}$ 2m $\Omega$ Integrated Shunt	0 to 36	50mA	25 $\mu\text{A}/^\circ\text{C}$	0.3	16 TSSOP
<a href="#">INA253 Family</a>	✓	✓	✓	High AC CMRR High Common Mode Current Sense Amplifier Solenoid Control with 0.1%, 15 PPM/ $^\circ\text{C}$ 2m $\Omega$ Integrated Shunt	-4 to 80	12.5mA	25 $\mu\text{A}/^\circ\text{C}$	0.25	20 TSSOP

*Preview devices as of Q2 2017.*

Part Number	AEC-Q100 Available	Bi-Directional	Low-Side	Description	Common Mode Voltage Range	Input Offset $\pm\mu\text{V}$ Max	Input Offset Drift $\pm\mu\text{V}/^\circ\text{C}$ Typ	Gain Error % Typ	Package(s)
<a href="#">INA301 Family</a>	✓		✓	Overcurrent Protection High-Speed, Precision Current Sense Amplifier with Integrated Comparator	0 to 36	35	0.1	0.03	8 VSSOP
<a href="#">INA302 Family</a>	✓	✓	✓	Overcurrent Protection High-Speed, Precision Current Sense Amplifier with Integrated Dual Comparators	0 to 36	30	0.02	0.02	14 TSSOP
<a href="#">INA303 Family</a>	✓	✓	✓	Overcurrent Protection High-Speed, Precision Current Sense Amplifier with Integrated Window Comparator	0 to 36	30	0.02	0.02	14 TSSOP
<a href="#">INA300</a>	✓		✓	Overcurrent Protection Comparator	0 to 36	500	0.1		10 WSON, 10 VSSOP
<a href="#">INA226</a>	✓	✓	✓	Ultra-High Accuracy, Current, Voltage, & Power	0 to 36	10	0.02	0.02	10 VSSOP
<a href="#">INA260</a>		✓	✓	Ultra-High Accuracy, Current, Voltage, & Power Monitor with 0.1%, 15 PPM/ $^\circ\text{C}$ 2m $\Omega$ Integrated Shunt	0 to 36	5mA	1 $\mu\text{A}/^\circ\text{C}$	0.02	16 TSSOP
<a href="#">INA233</a>			✓	High Accuracy, Current, Voltage, Power, & Energy Monitor with 1.8V I <sup>2</sup> C/PMBus	0 to 36	10	0.02	0.02	10 VSSOP
<a href="#">INA231</a>		✓	✓	Current, Voltage & Power Monitor with Alert in WCSP Package	0 to 28	50	0.1	0.2	12 WCSP
<a href="#">INA3221</a>	✓	✓	✓	Triple-channel, Current & Voltage Monitor with Alert	0 to 26	80	0.1	0.1	16 VQFN


*Preview devices as of Q2 2017.*



# Measuring current or power in your design?

Browse a series of short training videos to get started.

 [ti.com/currentsensetraining](http://ti.com/currentsensetraining)

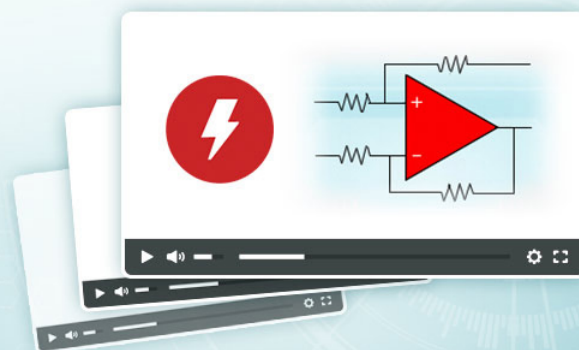

**Sensing** Innovation

## TI Worldwide Technical Support

### Internet

**TI Semiconductor Product Information Center Home Page**

[support.ti.com](http://support.ti.com)

**TI E2E™ Community Home Page**

[e2e.ti.com](http://e2e.ti.com)

### Product Information Centers

<b>Americas</b>	Phone	+1(512) 434-1560
<b>Mexico</b>	Phone	0800-670-7544
	Internet/Email	<a href="http://ti.com/lstds/ti/csc/support_Americas.page">ti.com/lstds/ti/csc/support_Americas.page</a>

### Europe, Middle East, and Africa

Phone	
European Free Call	00800-ASK-TEXAS (00800 275 83927)
International	+49 (0) 8161 80 2121
Russian Support	+7 (4) 95 98 10 701
<b>Note:</b> The European Free Call (Toll Free) number is not active in all countries. If you have technical difficulty calling the free call number, please use the international number above.	

Internet	<a href="http://www.ti.com/asktexas">www.ti.com/asktexas</a>
Direct Email	<a href="mailto:asktexas@ti.com">asktexas@ti.com</a>

### Japan

Fax	International	+81-3-3344-5317
	Domestic	0120-81-0036
Internet/Email	International	<a href="http://ti.com/lstds/ti/csc/support_Japan.page">ti.com/lstds/ti/csc/support_Japan.page</a>
	Domestic	<a href="http://www.tij.co.jp/pic">www.tij.co.jp/pic</a>

### Asia

Phone	Toll-Free Number
<b>Note:</b> Toll-free numbers may not support mobile and IP phones.	
Australia	1-800-999-084
China	800-820-8682
Hong Kong	800-96-5941
India	000-800-100-8888
Indonesia	001-803-8861-1006
Korea	080-551-2804
Malaysia	1-800-80-3973
New Zealand	0800-446-934
Philippines	1-800-765-7404
Singapore	800-886-1028
Taiwan	0800-006800
Thailand	001-800-886-0010
International	+86-21-23073444
Fax	+86-21-23073686
Email	<a href="mailto:tiasia@ti.com">tiasia@ti.com</a> or <a href="mailto:ti-china@ti.com">ti-china@ti.com</a>
Internet	<a href="http://support.ti.com/sc/pic/asia.htm">support.ti.com/sc/pic/asia.htm</a>
Technical forums	<a href="http://www.deyisupport.com">www.deyisupport.com</a>

**Important Notice:** The products and services of Texas Instruments Incorporated and its subsidiaries described herein are sold subject to TI's standard terms and conditions of sale. Customers are advised to obtain the most current and complete information about TI products and services before placing orders. TI assumes no liability for applications assistance, customer's applications or product designs, software performance, or infringement of patents. The publication of information regarding any other company's products or services does not constitute TI's approval, warranty or endorsement thereof.

B021014

The platform bar, E2E, Sitara and Code Composer Studio are trademarks and SIMPLE SWITCHER is a registered mark of Texas Instruments. All other trademarks are the property of their respective owners.

## IMPORTANT NOTICE FOR TI DESIGN INFORMATION AND RESOURCES

Texas Instruments Incorporated ("TI") technical, application or other design advice, services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using any particular TI Resource in any way, you (individually or, if you are acting on behalf of a company, your company) agree to use it solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources.

You understand and agree that you remain responsible for using your independent analysis, evaluation and judgment in designing your applications and that you have full and exclusive responsibility to assure the safety of your applications and compliance of your applications (and of all TI products used in or for your applications) with all applicable regulations, laws and other applicable requirements. You represent that, with respect to your applications, you have all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. You agree that prior to using or distributing any applications that include TI products, you will thoroughly test such applications and the functionality of such TI products as used in such applications. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

You are authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING TI RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY YOU AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

You agree to fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of your non-compliance with the terms and provisions of this Notice.

This Notice applies to TI Resources. Additional terms apply to the use and purchase of certain types of materials, TI products and services. These include; without limitation, TI's standard terms for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>), [evaluation modules](#), and [samples](http://www.ti.com/sc/docs/sampterm.htm) (<http://www.ti.com/sc/docs/sampterm.htm>).

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2017, Texas Instruments Incorporated